

Datenblatt

LED Lichtleiste "Linear" 10W, 20W, 40W



1. 0.3-1.2M available (1ft-4ft)
2. 90LM/W
3. Driver inside
4. Milky PC cover and Aluminum housing
5. Dimmable available
6. Flexible and convenient installation

Specification:

- 0.3M -10W/900LM CRI80 24*75*300mm
- 0.6M -20W/1800LM CRI80 24*75*600mm
- 0.9M -30W/2400LM CRI80 24*75*900mm
- 1.2M -40W/3600LM CRI80 24*75*1200mm



Installation



Lamp holder



Back side



Clips

Produktbeschreibung:

Linear LED Lichtleiste



Vielseitige Verwendungsbereiche (Auswahl): Konferenzräume, Flure, Empfangsräume, Büro, Schulen

Problemlose Installation durch die Clip-Halterung

Merkmale:

Hohe Lebensdauer : 50.000 Stunden
 Hohe Lichteffizienz
 Aluminiumgehäuse mit opale Polycarbonat Abdeckung
 Blendungsbegrenzung und Soft-Lighting Effect
 Flaches Design
 Lichtfarbe: Warmweiß, Naturweiß, Kaltweiß

Abmessungen:

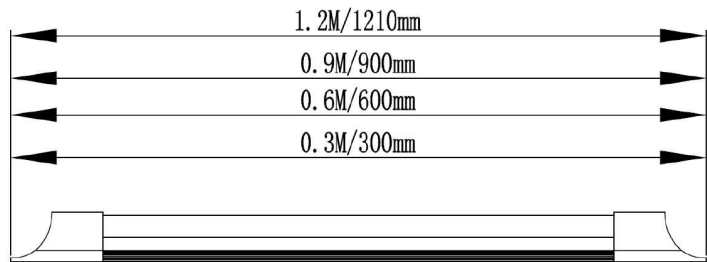

Spezifikationen:

Betriebsspannung: 100-240V (AC)
 Leistungsaufnahme: 10W, 20W, 40W
 Power Faktor: >0,90
 Abstrahlwinkel: 120°
 Farbtemperatur + Lumen:

	Warmweiß	Normalweiß	Kaltweiß
10W	3000K / 800lm	4000K / 900lm	6000K / 1000lm
20W	3000K / 1700lm	4000K / 1800lm	6000K / 1900lm
40W	3000K / 3500lm	4000K / 3600lm	6000K / 3700lm

CRI: >80Ra
 Kühlkörper: Aluminium
 Betriebstemperatur: -20°C bis +40°C
 Lagertemperatur: -40°C bis +80°C
 IP Schutzklasse: IP41

Zertifikate:

CE, RoHS

Bestellnummern:

23240wwm	3000 Kelvin, 10 Watt
23240nwm	4000 Kelvin, 10 Watt
23241wwm	3000 Kelvin, 20 Watt
23241nwm	4000 Kelvin, 20 Watt
23242wwm	3000 Kelvin, 40 Watt
23242nwm	4000 Kelvin, 40 Watt